


# Brondell®

## Swash DR802 Advanced Bidet Toilet Seat with Remote Control

**Models:** DR802-EW, DR802-RW

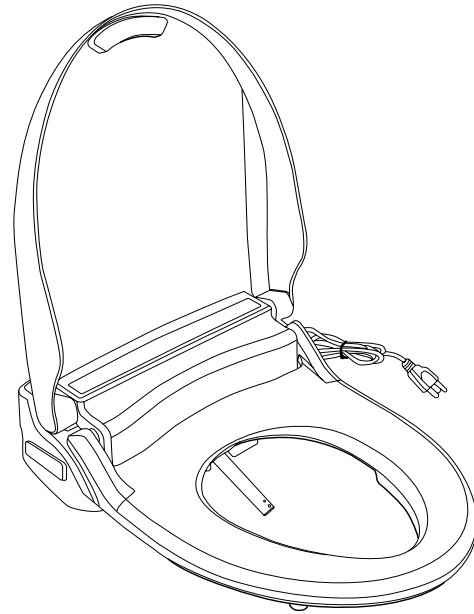


### Features

- Hybrid Water Heating System
- Fully Adjustable Water Temperature and Pressure
- Heated Toilet Seat with 4 Temperature Levels
- Built-in Carbon Deodorizer
- Warm Air Dryer with 5 Temperature Levels
- LED Nightlight with On/Off Option
- Self-Cleaning, Stainless Steel Nozzle
- Five Adjustable Nozzle Positions
- Nozzle Oscillation, Gentle, Strong, and Pulse Wash Modes
- Gentle-Close, Sit-Upon Seat and Lid
- Wireless Remote Control with Mount
- All Parts Included for Standard Installation
- 1-year Limited Warranty

### Technical Specifications

Power Voltage / Frequency	120 V / 60 Hz
Max Power Consumption	870 W
Power Cord Length	46.8" / 118.87 cm
Rated Power Source	120 V
Remote Control Battery Type / Quantity	AAA Alkaline / 4 units
Seat Weight Limit	330 lb / 149.7 kg
Lid Weight Limit	160 lb / 72.6 kg
Deodorizer Filter Type	Carbon



**NOTE:** The specifications listed above are subject to change without prior notice for reasons of improving the product performance.

# Brondell®

Weight and Dimensions	
Dimensions (L x W x H)	Elongated: 20.8" x 15.98" x 5.71" / 52.83 cm x 40.6 cm x 14.5 cm Round: 19.53" x 15.98" x 5.71" / 49.61 cm x 40.6 cm x 14.5 cm
Seat Thickness	1.4" / 3.55 cm
Bidet Hose Length	15.75" / 40 cm
Bidet Hose Connection Size	½" x ½"
T-Valve Connection Size	⅞" x ⅞" x ½"
Weight	Elongated: 12.2 lb / 5.53 kg Round: 11.68 lb / 5.3 kg

Warm Water Washing Device	
Supply Water Pressure	9.95 psi–106.67 psi / 0.07 MPa–0.74 MPa
Flow Rate	Rear Wash: Max 0.21 gal/min / 0.79 L/min Front Wash: Max 0.18 gal/min / 0.68 L/min Strong Wash: Max 0.16 gal/min / 0.61 L/min
Incoming Water Temperature	37°F–104°F / 3°C–40°C
Default Cycle Time	2 Minutes
Water Pressure Control	5 Levels
Water Temperature Control	4 Levels: OFF - Room Temp; Low - 91.4°F / 33°C; Medium - 96.8°F / 36°C; High - 102.2°F / 39°C
Max Heater Power Consumption	800 W
Safety Devices	Thermal Fuse, Thermostat, Water Level Sensor, Thermal Sensor, Bi-metal

Heated Seat and Air Dryer	
Seat Temperature Control	4 Levels: OFF - Room Temp; Low - 93.2°F / 34°C; Medium - 100.4°F / 38°C; High - 107.6°F / 42°C
Max Seat Heater Power Consumption	55 W
Number of Dryer Settings	5 Levels
Default Dryer Cycle Time	2 Minutes
Safety Devices	Thermal Fuse, Thermal Sensor

## Get the right fit.

- A. Center of bolt holes to front of toilet bowl  
Elongated: 17.7"–18.5" / 44.9 cm–47 cm  
Round: 16.9"–17.5" / 42.9 cm–44.5 cm
- B. Distance from center of bolt holes to toilet seat tank  
All models: Minimum 1.5" / 3.81cm  
If the distance from the center of the bolt holes to the toilet tank is less than 1.5 inches, the seat may extend slightly over the front edge of your toilet bowl.  
If the distance from the center of the bolt holes to the toilet tank is less than 2 inches, the seat may extend slightly over the front edge of your toilet bowl.
- C. Distance between bolt holes  
All models: 5.25"–7.45" / 13.3cm–18.9cm
- D. Measure the distance from the front of the toilet tank to the front of the toilet bowl.  
If this measurement is less than 20 inches, the seat will extend over the front edge of the toilet. Consider purchasing a Round size to reduce the amount the seat extends over the front edge.

